

Docket No.: 4481-031

PATENT

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

David Moir ARCHIBALD

Serial No. Not Yet Assigned

Filed: October 5, 2000

For: CORRELATION OF SIGNALLING MESSAGES  
CLAIM OF PRIORITYAssistant Commissioner For Patents  
Washington, D.C. 20231

Dear Sir:

In accordance with the provisions of 35 U.S.C. 119, Applicant(s) hereby claim(s) the  
priority of:

**Great Britain Application No. 9923866.9 filed October 8, 1999**

cited in the Declaration of the present application.


Certified copy(ies) is(are) submitted herewith.

Respectfully submitted,

LOWE HAUPTMAN GOPSTEIN GILMAN &amp; BERNER, LLP

Allan M. Lowe  
Registration No. 19,6411700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314  
(703) 684-1111  
(703) 518-5499 Facsimile  
AML:rl

**THIS PAGE BLANK (USPTO)**



The  
Patent  
Office



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



## CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Evans*

Dated

- 8 FEB 2000

**THIS PAGE BLANK (USPTO)**

- 8 OCT 1999

NEWPORT

11OCT1999 E482863-1 001463  
P01/7700 0.00 - 9923866.9

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport

Gwent NP9 1RH

08 OCT 1999

1. Your reference

30990122 GB

2. Patent application number

(The Patent Office will fill in this part)

9923866.9

3. Full name, address and postcode of the or of each applicant (underline all surnames)

HEWLETT-PACKARD COMPANY  
3000 HANOVER STREET  
PALO ALTO  
CALIFORNIA 94304  
USA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

DELAWARE USA

49658800/m

4. Title of the invention

CORRELATION OF SIGNALLING MESSAGES

5. Name of your agent (if you have one)

COKER, DAVID GRAEME

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ABILENT TECHNOLOGIES UK LTD

**HEWLETT-PACKARD**  
INTELLECTUAL PROPERTY SECTION  
FILTON ROAD, STUKE GIFFORD  
BRISTOL BS34 0GZ, ENGLAND

LEGAL DEPT  
M/S CSCA15  
ESKDALE ROAD  
WINNERSH TRIANGLE  
WOKINGHAM  
BERKSHIRE RG41 5DZ

A/L  
14.1.00  
M/R

Patents ADP number (if you know it)

1933005 m/s  
77718P4-001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

7

Claim(s)

4

Abstract

1

Drawing(s)

3

+3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

FEE SHEET

11. I/We request the grant of a patent on the basis of this application.

Signature

*[Handwritten Signature]*

Date

8/18/99

12. Name and daytime telephone number of person to contact in the United Kingdom

JONET SMITH

0117-312-8026

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## Correlation of signalling messages

[30990122]

### Technical Field

5 This invention relates to correlation of signalling messages conforming to different protocols, for example for bearer identifier discovery in a distributed switch environment.

### Background Art

10 Existing telecommunications networks, for example the international public switched telephone network (PSTN) are typically configured so that equipment (such as switches) in the transmission or bearer network, which carries user traffic (voice and data signals), is co-located with equipment (such as signalling points) in the associated signalling network, which carries control signals for coordinating the operation of the bearer network.

15 However, attention is now being directed to the possibility of telecommunications networks comprising distributed telecommunications switches, in which there is a separation of the switching/adaptation functionality from the signalling functionality. Furthermore, consideration is being given to the possibility of connecting dissimilar such networks (i.e. networks relying on different bearer technologies and/or signalling protocols).

20 Dissimilar telecommunications networks are typically interconnected via a "gateway" which provides the necessary conversions or adaptations between the bearer traffic and signalling protocol in each of the networks. In such an architecture control devices such as Media Gateway Controllers can be physically remote from the adaptation devices, such as Media Gateways. Media Gateway Controllers can communicate with the Media Gateways they control using protocols such as Simple Gateway Control Protocol (SGCP), Media Gateway Control Protocol (MGCP), and the Megacop/H.248 protocol currently being defined. Media Gateway Controllers communicate with each other using extensions of 25 current Call Control protocols such as Signalling System No.7 ISDN User Part (SS7 ISUP), Session Initiation Protocol (SIP – IETF RFC 2543), or ITU Recommendation H.323. New protocols may be defined for this interface in the future.

30 Protocol monitoring applications, such as tracing across a signalling network the protocol messages associated with a call, or building Call Data Records (CDRs) to summarise the key parameters relating to a call, require the ability to correlate across different protocols, which may refer to a single entity in multiple different, inconsistent ways. It is an object of this invention to facilitate such correlation.

### 35 Disclosure of Invention

According to one aspect of this invention there is provided a method of establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising the steps of:

monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;

selecting first messages containing an identification related to an end user of said bearer data item and a first identification of a bearer channel carrying said bearer data item;

5 selecting second messages containing a second identification of a bearer channel carrying said bearer data item and a call identifier with system-wide significance;

selecting third messages containing an identification related to an end user of said data item and a call identifier with system-wide significance; and

10 using said selected third messages to establish a correlation between the first and second bearer channel identifications.

According to another aspect of this invention there is provided a method of establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising the steps of:

15 monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;

selecting first messages containing an identification related to an end user of said bearer data item and a first identification of a bearer channel carrying said bearer data item;

selecting second messages containing a second identification of a bearer channel carrying said bearer data item and a transaction identifier;

20 selecting third messages containing an identification related to an end user of said data item and packet network address information;

selecting fourth messages containing packet network address information and a transaction identifier; and

25 using said selected third and fourth messages to establish a correlation between the first and second bearer channel identifications.

According to a further aspect of this invention there is provided a method of establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising the steps of:

30 monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;

selecting first call initiation messages containing a first identification of a bearer channel carrying said bearer data item;

selecting second call initiation messages containing a second identification of a bearer channel carrying said bearer data item;

35 determining elapsed time between occurrence of said first and second messages; and

establishing a correlation between first and second messages for which the elapsed time is below a predetermined threshold, and thus between the first and second bearer



channel identifications.

According to another aspect of this invention there is provided apparatus for establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising:

- 5 monitoring equipment for monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;
- a first selector for selecting first messages containing an identification related to an end user of said bearer data item and a first identification of a bearer channel carrying said bearer data item;
- 10 a second selector for selecting second messages containing a second identification of a bearer channel carrying said bearer data item and a call identifier with system-wide significance;
- a third selector for selecting third messages containing an identification related to an end user of said data item and a call identifier with system-wide significance; and
- 15 a correlator for establishing a correlation between the first and second bearer channel identifications in accordance with said selected third messages.

According to a further aspect of this invention there is provided apparatus for establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising:

- 20 monitoring equipment for monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;
- a first selector for selecting first messages containing an identification related to an end user of said bearer data item and a first identification of a bearer channel carrying said bearer data item;
- 25 a second selector for selecting second messages containing a second identification of a bearer channel carrying said bearer data item and a transaction identifier;
- a third selector for selecting third messages containing an identification related to an end user of said data item and packet network address information;
- a fourth selector for selecting fourth messages containing packet network address information and a transaction identifier; and
- 30 a correlator for establishing a correlation between the first and second bearer channel identifications in accordance with said selected third and fourth messages.

- According to another aspect of this invention there is provided apparatus for establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising:
- 35 a monitor for monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;

a first selector for selecting first call initiation messages containing a first identification of a bearer channel carrying said bearer data item;

a second selector for selecting second call initiation messages containing a second identification of a bearer channel carrying said bearer data item;

5 a monitor for determining elapsed time between occurrence of said first and second messages; and

a correlator for establishing a correlation between first and second messages for which the elapsed time is below a predetermined threshold, and thus between the first and second bearer channel identifications.

10

#### Brief Description of Drawings

A method and apparatus in accordance with this invention, for correlation of signalling messages to enable bearer identifier discovery in a distributed switch environment, will now be described, by way of example, with reference to the accompanying drawings, in  
15 which:

- Figure 1 shows the topology of an exemplary network incorporating multiple telecommunications media and distributed switches;
- Figure 2 shows a possible sequence of signalling messages used to set up a call across a network such as that of Figure 1; and
- 20 Figure 3 lists protocol fields which may be used to correlate messages relating to a single call traversing multiple telecommunications media.

#### Best Mode for Carrying Out the Invention, & Industrial Applicability

Referring to Figure 1, a Media Gateway Controller (MGC) 10 and an associated  
25 Media Gateway (MG) 12 link the public switched telephone network (PSTN) 14 to a packet network 16, which in this example is shown as using Asynchronous Transfer Mode (ATM) technology. The PSTN 14 uses SS7 ISUP over its signalling links 18 to the MGC, and time division multiplexing (TDM) for transmission of user traffic (for example voice calls and other bearer data items) over its transmission or bearer channels 20 to the MG 12. The MGC  
30 10 exchanges signalling messages with other MGCs, such as an MGC 10a, over a signalling link 22 using SS7 ISUP with extensions which have been previously defined for this purpose. The MG 12 transfers the voice calls, in the form of Voice over ATM messages, to and from the ATM network 16 over ATM channels 24 which also carry ATM signalling messages in conventional manner. The MGC 10 controls the MG 12 via a link 26 carrying MGCP  
35 messages.

Figure 2 shows part of one possible sequence of messages used to set up a call across such a network, as follows:

1. the PSTN 14 sends an Initial Address Message (IAM) to the MGC 10;
2. the MGC 10 then sends a Create Connection (CRCX) message to the MG 12, to define an endpoint for a packet network connection over the channels 24;
3. when this has been accomplished the MG 12 returns an OK acknowledgement
- 5       containing address information for the packet network endpoint, coded as a Session Description Protocol (SDP – RFC 2327) Connection Description Parameter;
4. thereafter the MGC sends another IAM over the link 22 to the packet network.

In calls controlled by a single MGC message number 4 does not occur. For a call in the opposite direction, i.e. terminating in the PSTN, the same messages would occur but the

10       messages 1 and 4 would be interchanged.

Although the different messages on their respective links all relate to the same overall call or transaction, the different ways in which their respective protocols identify the call (e.g. by reference to the subscriber, or to the equipment used to carry the call, or to an arbitrary reference number) prevent a simple association of these messages to derive a complete

15       description of the call. Such descriptions are desirable, for example, to build Call Detail Records for billing and other management functions, or in order to trace progress of the call through the system during fault finding.

Figure 3 highlights fields in (by way of example) the SS7 and MGCP protocols which may be used to correlate messages belonging to a single call traversing the network shown in

20       Figure 2. The PSTN trunk associated with a call is identified in the SS7 ISUP (or Telephone User Part – TUP) signalling by the combination of Destination Point Code (DPC), Originating Point Code (OPC) and Circuit Identification Code (CIC) fields, as defined in the ITU's Recommendation Q.767. In the MGCP protocol used between the MGC and the MG, the same trunk is identified by an endpointname of the form

25       localEndpointname@Domainname, where localEndpointname is a character string, and Domainname is a Domain name as defined by the Internet Engineering Task Force's document RFC 821. In order to associate, say, an SS7 ISUP call protocol sequence with the corresponding MGCP protocol sequence, it is necessary to be able to correlate these two identifications.

30       The invention enables the association between the SS7 OPC-DPC-CIC trunk identification and the endpointname used by the MGCP (or any similar protocol ) to be discovered and stored for subsequent use by any appropriate application program, such as for billing.

To this end, the various signalling links and channels in the network surrounding the

35       MGC 10 are provided with passive monitoring devices 28 and 30 as shown in Figure 2. For monitoring SS7 links Hewlett-Packard *acceSS7* monitoring equipment may be used; for other channels (e.g. ATM or IP) equipment of similar functionality with interfaces adapted to

match those technologies would be used. The monitoring devices 28 and 30 detect and generate copies of all signalling messages traversing the links and channels around the MGC 10. These copies are then transferred, for example via a local area network, to a monitoring control centre 32, which typically comprises data storage equipment and associated data processing equipment operating under the control of appropriate software program instructions to perform the required analyses of the data collected.

Using the data thus acquired, a table of associations between OPC-DPC-CIC identifications and endpointnames can be built by the monitoring control centre 32. For this purpose the required associations are deduced as follows:

- 10     - where an IAM between MGC's (inter-MGC IAM) is generated following the arrival of an SS7 IAM (or vice versa), these two messages can be correlated by the combination of Calling & Called address parameters;
- the SDP connection description parameter included in inter-MGC IAMs and MGCP OK messages can be used to correlate these messages;
- 15     - the MGCP OK message can be correlated with the MGCP CRCX message using the transaction ID included in both of them.

Thus each pair of message types described above provides a step in a sequence by which all four types of messages can be associated as relating to a single call: SS7 IAM with inter-IAM; inter-IAM with MGCP OK; and MGCP OK with MGCP CRCX. This in turn enables the required correspondence to be deduced between an MGCP endpointname (in the CRCX message) and an ISUP OPC-DPC-CIC identification (in the SS7 IAM).

This requires the buffering of initial IAM and MGCP messages for a short time, for example in the monitoring control centre, until the associated messages on the other links occur and can be detected.

25     Another way of making an association (although it is only tentative in nature) is to correlate the OPC-DPC-CIC identification from the SS7 IAM with the endpointname in an MGCP CRCX message which occurs within a predetermined short time interval after the IAM arrives (and provided no other such IAM messages occur between the times the chosen IAM and the CRCX are monitored, and also provided no subsequent CRCX messages are monitored during a suitably long time period thereafter). Associations detected in this manner should be marked as 'suspected' rather than 'known' in the table, until they can be confirmed by the first technique described above. This approach may speed up the discovery process in cases where a high proportion of calls are controlled by a single MGC.

35     This alternative method can be refined by eliminating from consideration any messages containing OPC-DPC-CIC identifications or endpointnames already present (as 'known') in the association table. This increases the probability that the messages under consideration will reduce to a single IAM and CRCX pair. As the table of discovered

associations becomes more nearly complete, this method becomes more successful.

5 The association table can be accessed in use by protocol monitoring applications which need to establish linkages between messages relating to a particular call. Depending on the particular type of application, 'suspected' associations could be either ignored or used, with an appropriate warning to the application user.

10 The techniques described above eliminate the need for error-prone manual configuration of an association table, as has been previously required. They rely only on standardised protocol message formats, and thus avoid the possible need to deal with multiple, proprietary, vendor-specific Operation Support System (OSS) interfaces as would be required if data to build the association table were extracted from such OSSs.

The invention has been described by way of example in the context of SS7 and MGCP protocols. However, it will be understood that the invention is equally applicable in connection with the use of any other protocol defining messages which contain indications of end users and/or bearer channels.

## CLAIMS

[30990122]

1. A method of establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising the steps of:

5 monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;

selecting first messages containing an identification related to an end user of said bearer data item and a first identification of a bearer channel carrying said bearer data item;

10 selecting second messages containing a second identification of a bearer channel carrying said bearer data item and a call identifier with system-wide significance;

selecting third messages containing an identification related to an end user of said data item and a call identifier with system-wide significance; and

15 using said selected third messages to establish a correlation between the first and second bearer channel identifications.

2. A method of establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising the steps of:

20 monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;

selecting first messages containing an identification related to an end user of said bearer data item and a first identification of a bearer channel carrying said bearer data item;

25 selecting second messages containing a second identification of a bearer channel carrying said bearer data item and a transaction identifier;

selecting third messages containing an identification related to an end user of said data item and packet network address information;

selecting fourth messages containing packet network address information and a transaction identifier; and

30 using said selected third and fourth messages to establish a correlation between the first and second bearer channel identifications.

3. The method of claim 2, wherein the fourth messages comprise responses to said second messages.

- 35 4. The method of any one of the preceding claims, wherein the first messages are SS7 ISUP Initial Address Messages, the end user identification comprises calling and called party addresses, and the first bearer channel identification comprises an OPC-DPC-CIC

combination.

5     5.     The method of any one of the preceding claims, wherein the second messages are MGCP Create Connection messages and the second bearer channel identification comprises endpoint identifier parameters.

6.     The method of any one of the preceding claims, wherein the third messages are ISUP Initial Address Messages and the end user identification comprises calling and called party addresses.

10

7.     The method of claim 2, wherein the fourth messages are MGCP Response messages, the packet network address information comprises an SDP connection descriptor parameter, and the transaction identifiers comprise transaction ID parameters.

15

8.     A method of establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising the steps of:

monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;

20

selecting first call initiation messages containing a first identification of a bearer channel carrying said bearer data item;

selecting second call initiation messages containing a second identification of a bearer channel carrying said bearer data item;

25

determining elapsed time between occurrence of said first and second messages; and

establishing a correlation between first and second messages for which the elapsed time is below a predetermined threshold, and thus between the first and second bearer channel identifications.

30

9.     The method of claim 8, wherein establishment of a correlation between first and second messages is also dependent upon absence of any similar messages within a predetermined time interval.

35

10.    The method of claim 8, wherein the first messages are SS7 ISUP Initial Address Messages, the end user identification comprises calling and called party addresses, and the first bearer channel identification comprises an OPC-DPC-CIC combination.

11.    The method of claim 8, wherein the second messages are MGCP Create Connection

messages and the second bearer channel identification comprises endpoint identifier parameters.

12. A method of establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, substantially as hereinbefore described with reference to the accompanying drawings.

13. Apparatus for establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising:  
monitoring equipment for monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;

a first selector for selecting first messages containing an identification related to an end user of said bearer data item and a first identification of a bearer channel carrying said bearer data item;

a second selector for selecting second messages containing a second identification of a bearer channel carrying said bearer data item and a call identifier with system-wide significance;

a third selector for selecting third messages containing an identification related to an end user of said data item and a call identifier with system-wide significance; and

a correlator for establishing a correlation between the first and second bearer channel identifications in accordance with said selected third messages.

14. Apparatus for establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising:

monitoring equipment for monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;

a first selector for selecting first messages containing an identification related to an end user of said bearer data item and a first identification of a bearer channel carrying said bearer data item;

a second selector for selecting second messages containing a second identification of a bearer channel carrying said bearer data item and a transaction identifier;

a third selector for selecting third messages containing an identification related to an end user of said data item and packet network address information;

a fourth selector for selecting fourth messages containing packet network address information and a transaction identifier; and

a correlator for establishing a correlation between the first and second bearer channel identifications in accordance with said selected third and fourth messages.



15. Apparatus for establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, comprising:

- 5 a monitor for monitoring messages traversing at least first and second signalling channels which conform to respective first and second signalling protocols;
- a first selector for selecting first call initiation messages containing a first identification of a bearer channel carrying said bearer data item;
- a second selector for selecting second call initiation messages containing a second identification of a bearer channel carrying said bearer data item;
- 10 a monitor for determining elapsed time between occurrence of said first and second messages; and
- a correlator for establishing a correlation between first and second messages for which the elapsed time is below a predetermined threshold, and thus between the first and second bearer channel identifications.

15

16. Apparatus for establishing a correlation between the contents of signalling messages conforming to different protocols but relating to a common bearer data item, substantially as hereinbefore described with reference to the accompanying drawings.

## ABSTRACT

## Correlation of signalling messages


[30990122]

5       Signalling messages conforming to different signalling protocols in a distributed  
switch telecommunications network are correlated by associating specific pairs of messages  
according to parameters they have in common. Inter-MGC IAMs and SS7 IAMs are  
correlated by the combination of Calling & Called address parameters; the connection  
descriptor parameter included in inter-MGC IAMs and MGCP OK messages can be used to  
correlate these messages; and the MGCP OK message can be correlated with the MGCP  
10       CRCX message using the transaction ID. Hence a correspondence can be deduced between  
an MGCP endpointname (in the CRCX message) and an ISUP OPC-DPC-CIC identification  
(in the SS7 IAM).

15       (Fig. 3)


Example Network Architecture

Fig.1

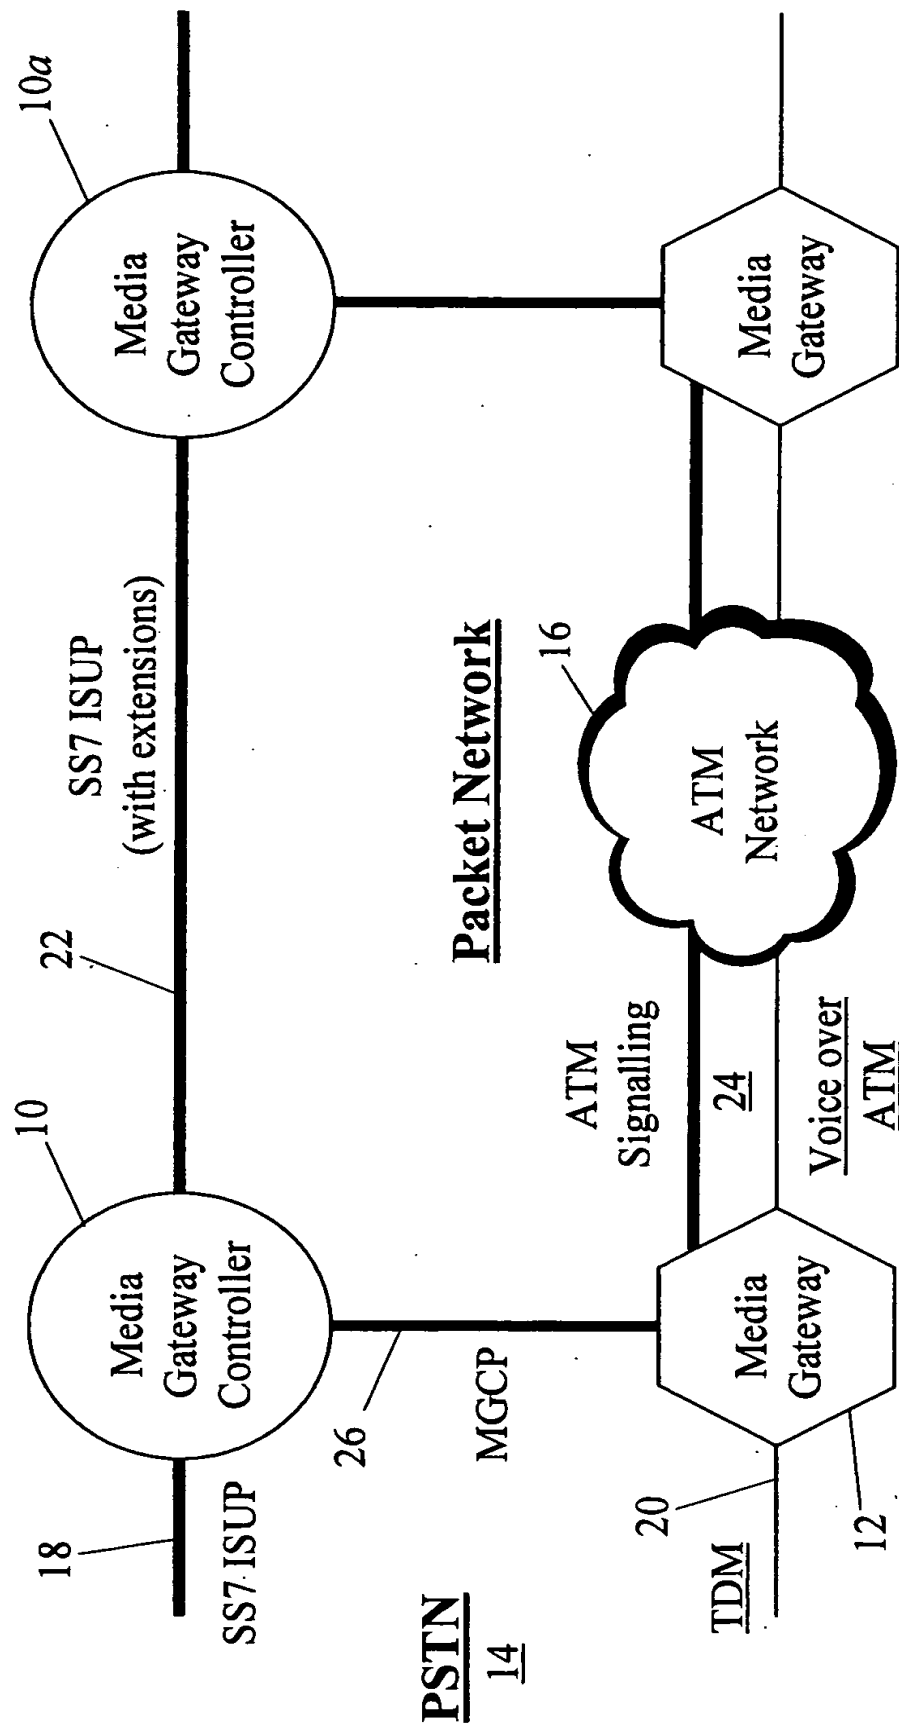

**THIS PAGE BLANK (USPTO)**

Initial Call Setup messages (PSTN-originated call)

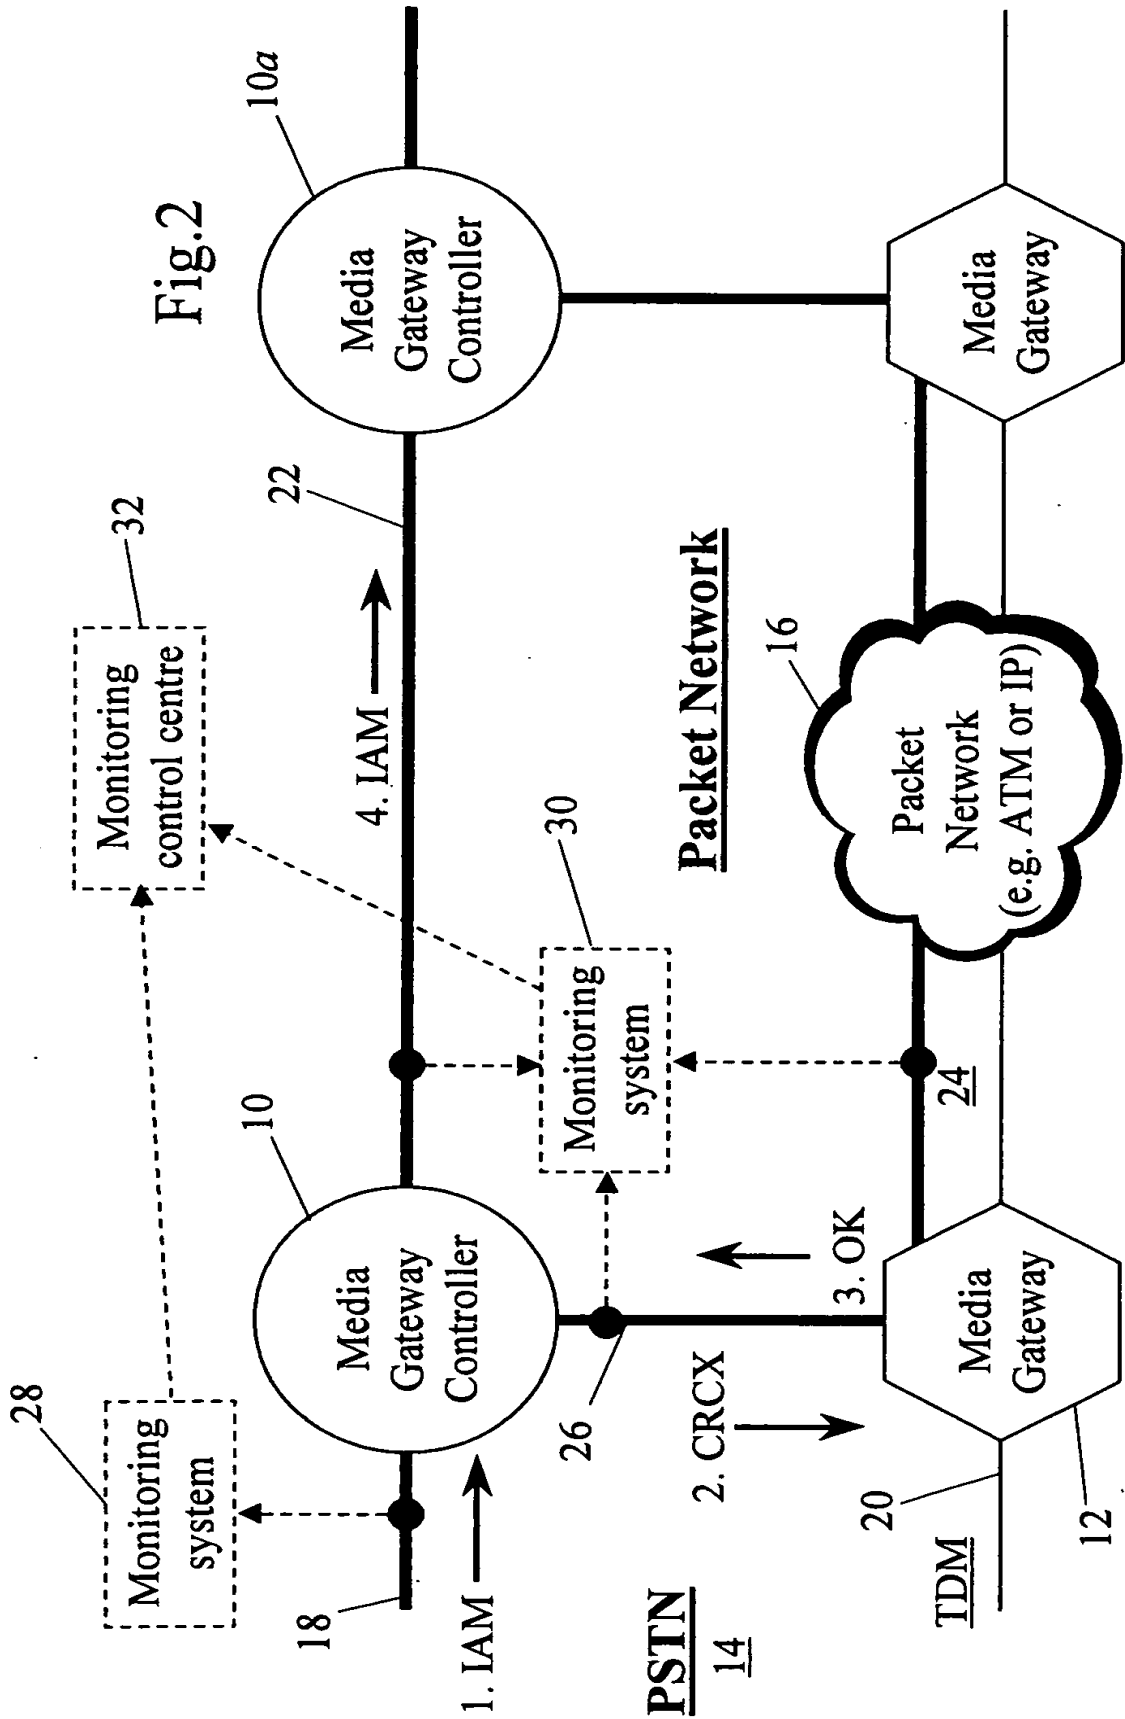

**THIS PAGE BLANK (USPTO)**

Parameters used to correlate between messages

- |   |      |   |  |
|---|------|---|--|
| 1 | IAM  | > | [Calling, called], [OPC,DPC,CIC]           |
| 2 | CRCX | > | [endpointname], [Transaction id]           |
| 3 | OK   | > | [Transaction Id], [Connection Descriptor]  |
| 4 | IAM  | > | [Calling,Called] , [Connection Descriptor] |

**THIS PAGE BLANK (USPTO)**